



# **CA-RC10-SH-NC Product Description**

A 10-pin MIL-C-5015 female connector on one end of a 12-conductor shielded round 24 AWG cable. This low-temperature version has a range of -20C to +80C.




**WARNING:** This product can cause exposure to substances, such as *phthalate plasticizers*, known to the State of California to cause cancer and reproductive harm. For more information, go to oehha.ca.gov/proposition-65 (https://oehha.ca.gov/proposition-65).

### **Specifications**

**PIN-OUT** 





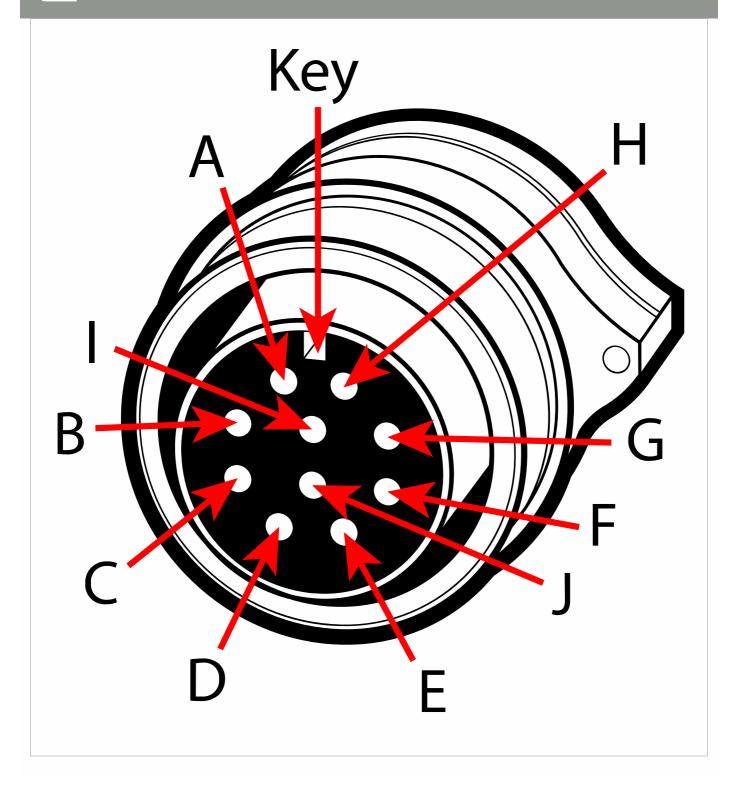



Toll Free: **800.736.0194**Worldwide: **360.260.2468**Support: **360.397.9999** 



#### CA-RC10-SH-NC 10-Pin MIL-C-5015 Connector / Unterminated, Shielded Cable


PIN	HD25 DESCRIPTION	HD25A DESCRIPTION	COLOR
Α	A+ Channel	DataH	Blue / White stripe
В	B+ Channel	Busy+	Brown / White stripe
С	I+ Channel(*)	Analog+	Orange / White stripe
D	+VDC	Power	Green / White stripe
E	-	-	Gray / White stripe
F	Common	Common	White / Gray stripe
G	Case Ground	Case Ground	White / Green stripe
Н	A- Channel	DataL	White / Blue stripe
I	B- Channel	Busy-	White / Brown stripe
J	I- Channel(*)	Analog-	White / Orange stripe

<sup>\*</sup> Only available when Index channel is specified.

### **Notes**

• US Digital® warrants its products against defects in materials and workmanship for two years. See complete warranty (https://www.usdigital.com/company/warranty) for details.

## **Configuration Options**



**PLEASE NOTE: This chart is for informational use only.** Certain product configuration combinations are not available. Visit the CA-RC10-SH-NC product page (https://www.usdigital.com/products/CA-RC10-SH-NC) for pricing and additional information.

