



CA-CFTR-PS-NC Product Description


This PUR (polyurethane) shielded cable has a T7 right angle connector at one end and unterminated wires at the other end. The cable has a built-in 120-ohm terminating resistor across pin 4 and pin 5. This cable is used with RS485 versions of US Digital's T7 Networked Absolute Inclinometer (<https://www.usdigital.com/products/inclinometers/t7/>).



WARNING: This product can cause exposure to substances, such as *phthalate plasticizers*, known to the State of California to cause cancer and reproductive harm. For more information, go to oehha.ca.gov/proposition-65 (<https://oehha.ca.gov/proposition-65>).

Specifications

PIN-OUT

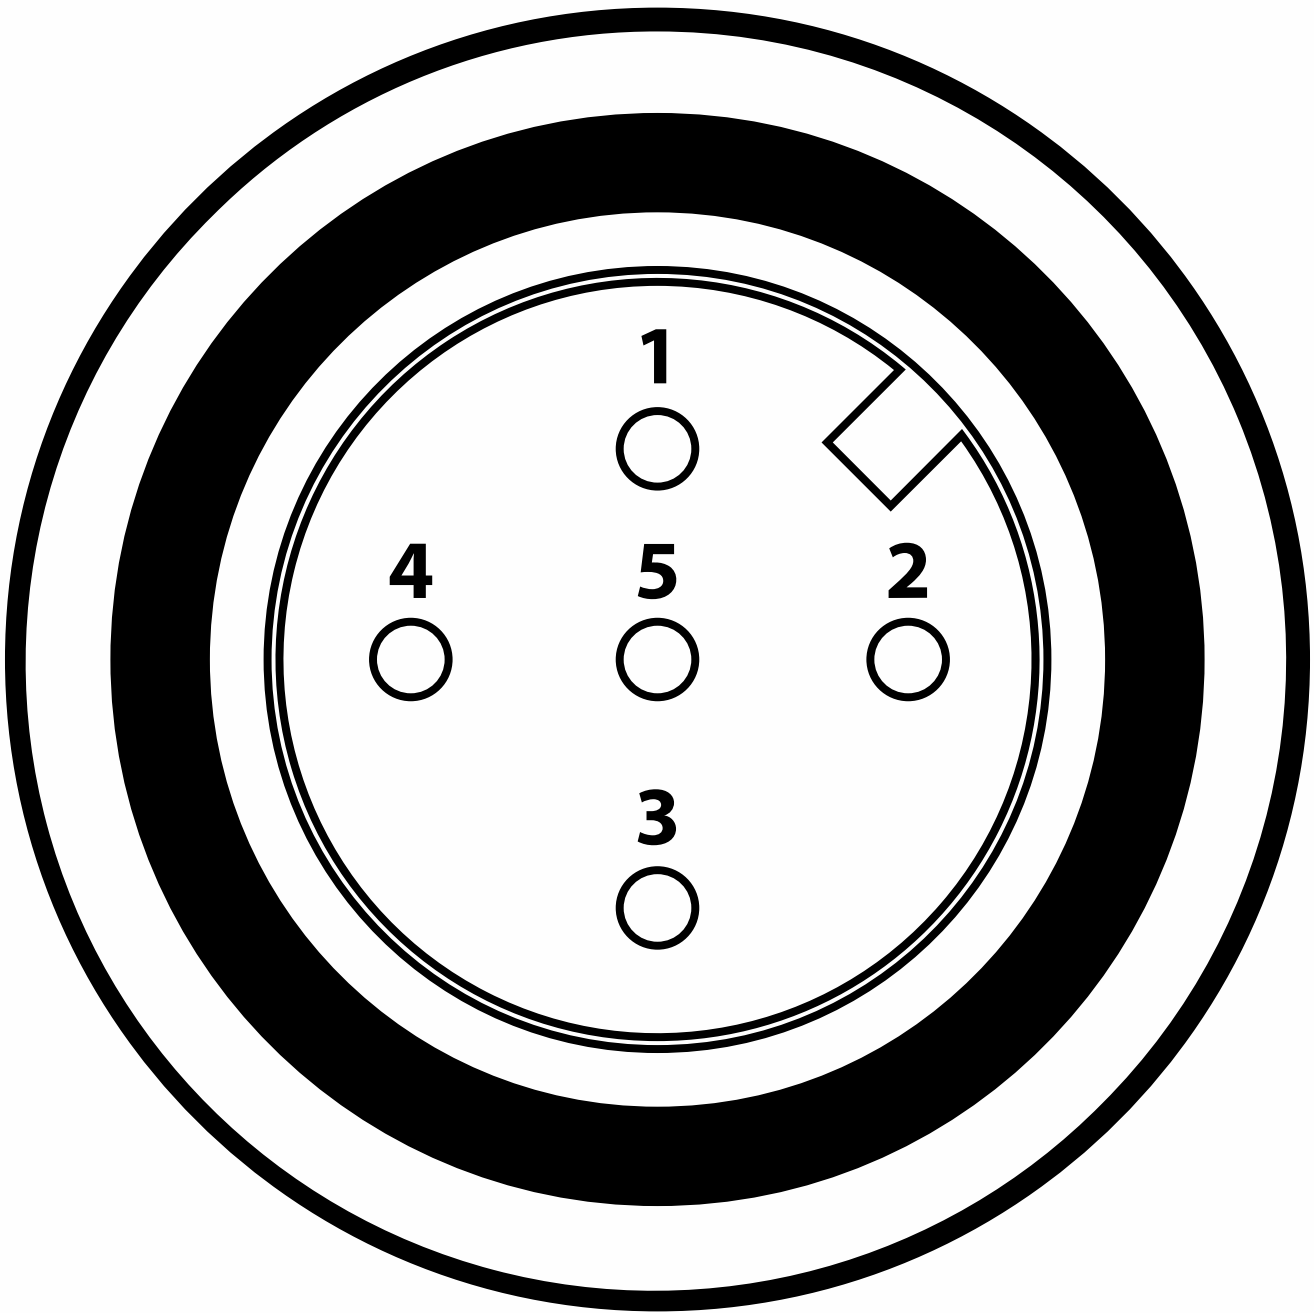

PIN	COLOR	DESCRIPTION
1	Drain	Shield
2	Red	+VCAN
3	Black	GND
4	White	TXD / BUS+
5	Blue	RXD / BUS-

Notes



- US Digital® warrants its products against defects in materials and workmanship for two years. See complete warranty (<https://www.usdigital.com/company/warranty>) for details.

Configuration Options

CA-CFTR-PS-NC	-	First Connector	-	Cable Type	-	Second Connector	-	Length
		CFTR		PS		NC		Length

PLEASE NOTE: This chart is for informational use only. Certain product configuration combinations are not available. Visit the CA-CFTR-PS-NC product page (<https://www.usdigital.com/products/CA-CFTR-PS-NC>) for pricing and additional information.