

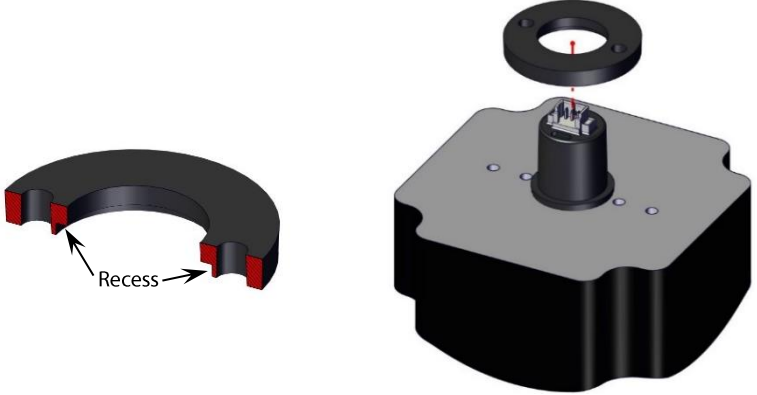
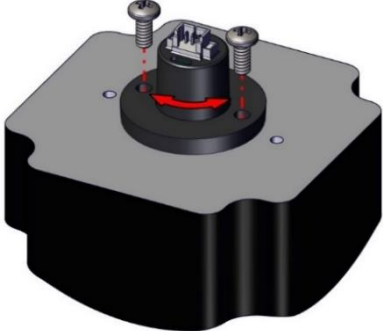


# MAE3 Assembly Instructions

**Please Note:** The MAE3 is recommended for use as a one-time installation.

|  |  |
|--|--|
| <p><b>Step 1:</b><br/>Slip push-on magnetic hub over shaft and firmly press down until top of shaft fills cavity of hub.</p>   |    |
| <p><b>Step 2:</b><br/>Place encoder body over shaft assembly so that it sits on mounting surface.</p>  |    |
| <p><b>Step 3:</b><br/>With recess in base facing towards mounting surface, place base over encoder body so that flange of body fits into recess of base.</p>   |  |
| <p><b>Step 4:</b><br/>Secure base to mounting surface with two screws (#4 recommended, sold separately).</p> <p><b>Zero positioning:</b> Prior to fully tightening screws, encoder can be powered and rotated by hand to set absolute zero position, if desired.</p> |  |

# MAE3 Assembly Instructions

**Please Note:** The MAE3 is recommended for use as a one-time installation.



[support@usdigital.com](mailto:support@usdigital.com) ▪ [www.usdigital.com](http://www.usdigital.com)

Local: 360.260.2468 ▪ Sales: 800.736.0194

Support: 360.397.9999 ▪ Fax: 360.260.2469

1400 NE 136<sup>th</sup> Ave. ▪ Vancouver, Washington ▪ 98684 ▪ USA